
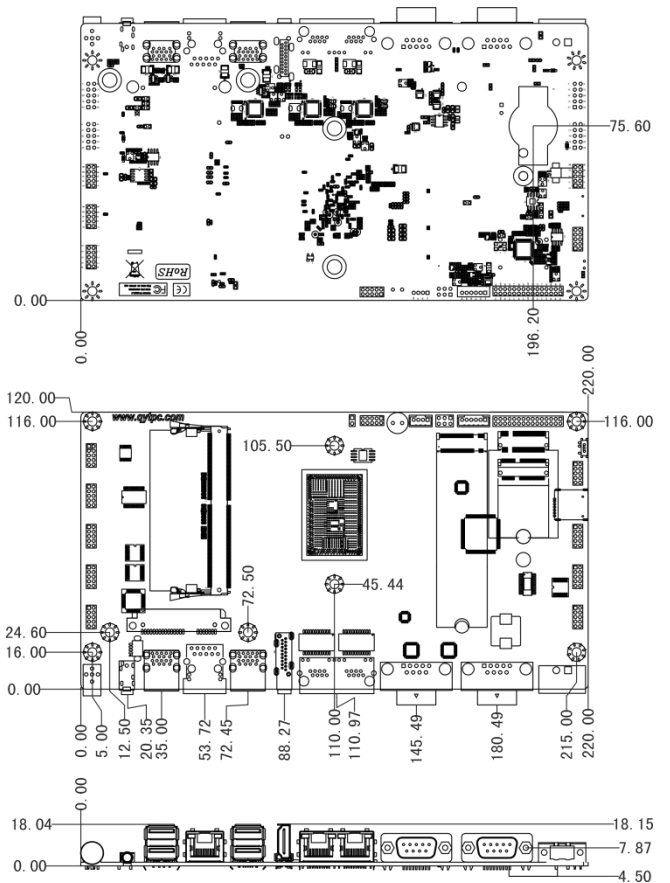
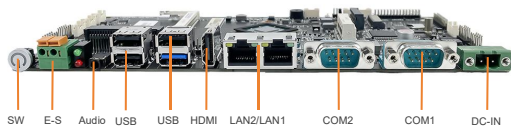


主板特点

- Intel® Bay Trail Celeron J1900 Quad-core 2.0GHz, TDP 10W
- 1 x DDR3 1333MHz SODIMM, MAX 8GB
- 1 x M.2.0 (2230, Wifi+BT), 1 x M.2.0 (3042, 4G), 1 x mSATA
- Supports dual independent display: 1 x HDMI, 1 x LVDS
- 2 x Intel® 226-V 2.5GbE Ethernet, support WoL and PXE
- 6 x COM (2x RS232/RS422/RS485), ESD and Surge Protection
- Support TPM2.0 hardware security
- 9V to 36VDC Wide Range Power Input, Supporting OVP / OCP / RPP

I/O Layout

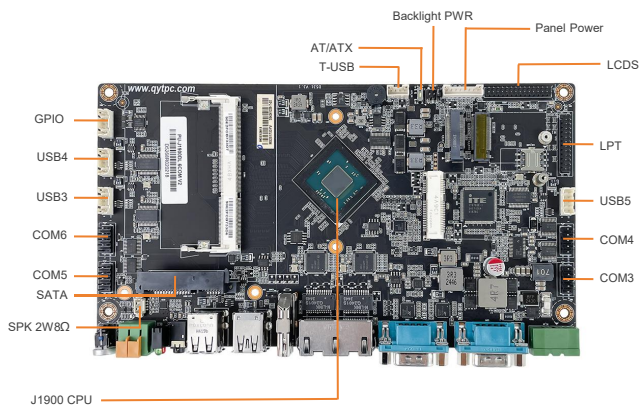

规格参数

系统参数	处理器	Intel® Bay Trail Celeron J1900 Quad-core 2.0GHz
	二级缓存	2MB
	散热设计功率	10W
	芯片组	Integrated with Intel® SoC
	BIOS	AMI UEFI BIOS
	看门狗定时器	Software Programmable Supports 1~255 sec. System Reset
	TPM	TPM 2.0
内存	Technology	Single Channel DDR3L 1333MHz, up to 8GB
	插座	1 x DDR3 SO-DIMM Slot
硬盘	SATA	1 x SATA3.0 Port
图像	控制器	Intel HD Graphics
声音	Codec	Realtek ACL662 Audio controller
显示	显示接口	1x HDMI, Max Resolution up to 4096x2160@30Hz
		1x LVDS: Dual Channel 18/24-bit, up to 1920x1200
I/O 接口	以太网	1x GbE1: Intel I226V 2.5GbE LAN PXE Support
		1x GbE2: Intel I226V 2.5GbE LAN PXE Support
	USB	3x USB 2.0 / 1x USB3.0 Gen1x1 (5Gbps), Type A
	串口	2x COM 1, COM 2 (RS-232 / 422 / 485, Adjustable through BIOS)
	音频	1x Audio_out & Mic_in
	电源按钮	1x Power Button
内置 I/O	M.2	1x M.2 (Key-E, 2230, PCIe+USB, Wifi+BT)
		1*M.2 (Key-B, 3042, USB2.0, 4G)
	mSATA	1x mSATA
	GPIO	1x 8bit GPIO(2*5pin)
		1x T-USB2.0 wafer(1*4pin)
	USB	3x USB2.0 wafer(2*5pin)
		4x RS232 wafer(2*5pin)(COM3/COM4/COM5/COM6)
	LPT	1x LPT(2*13pin)
	SPK	1x SPK 2W8Ω wafer (1*4pin)
Invertor	1x 12V/5V/3V Selectable	
SIM 插座	1x SIM Socket	
电源	电源类型	Support AT, ATX Mode
	电源输入	DC IN 9~36V
	电源连接器	1x 2-pin Phoenix Terminal Block
	电源保护	OVP (Over Voltage Protection) OCP (Over Current Protection) RPP (Reverse Polarity Protection)
操作系统	Windows	Windows 7 / 8 / 10 IoT Enterprise
	Linux	Linux
物理特性	产品尺寸	220mm x 120mm
	净重	0.5kg
环境/认证	工作温度	-20°C ~70°C, 10 ~90%(non-cpmdensing)
	存储温度	-40°C ~80°C, 10 ~90%(non-cpmdensing)
	认证	CE/FCC Class A